

08/31/00
JCS85 U.S. PTO

09-05-00

A

+

JCS85 U.S. PTO
09/05/95
08/31/00

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	K35A0646	Total Pages	
	First Named Inventor or Application Identifier			
	WILLIAM B. BOYLE			
	Express Mail Label No.	EK995292748US		

APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents.</i>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
--	--

<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (Submit an original, and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification [Total Pages 32] (preferred arrangement set forth below)</p> <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets 8] ___ Formal ___ Informal</p> <p>4. Oath or Declaration [Total Pages] a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below] i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</p> <p>5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p>	<p>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</p> <p>7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)</p> <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies
---	---

ACCOMPANYING APPLICATION PARTS	
8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))	
9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee)	<input type="checkbox"/> Power of Attorney
10. <input type="checkbox"/> English Translation Document (if applicable)	
11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449	<input type="checkbox"/> Copies of IDS Citations
12. <input type="checkbox"/> Preliminary Amendment	
13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)	
14. <input type="checkbox"/> Small Entity Statement filed in prior application, Statement(s) Status still proper and desired	
15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)	
16. <input type="checkbox"/> Other:	

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

NAME	WESTERN DIGITAL CORPORATION				
	Milad G. Shara, Esq. - Reg. 39,367				
ADDRESS	8105 IRVINE CENTER DRIVE				
	PLAZA 3				
CITY	IRVINE	STATE	CALIFORNIA	ZIP CODE	92618
COUNTRY	U.S.A.	TELEPHONE	(949) 932-5676	FAX	(949) 932-5633

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

**VIDEO RECORDING SYSTEM UTILIZING STORAGE REDUNDANCY TO
TRANSFER NON-TIME-CRITICAL, ERROR-INTOLERANT DATA
SEGMENTS WHILE TRANSFERRING TIME-CRITICAL, ERROR-
TOLERANT STREAMING DATA SEGMENTS AT A REQUIRED DATA
TRANSFER RATE**

Cross-reference to Related Applications

The present patent application is related to United States Patent Application Serial No. 09/628,583 (attorney docket no. K35A0636) filed on 7/31/00, entitled "VIDEO RECORDING SYSTEM UTILIZING HOST-PROCESSOR-RESIDENT ERROR RECOVERY TO TRANSFER NON-TIME-CRITICAL, ERROR-INTOLERANT DATA SEGMENTS WHILE TRANSFERRING TIME-CRITICAL, ERROR-TOLERANT STREAMING DATA SEGMENTS AT A REQUIRED DATA TRANSFER RATE," the specification of which is hereby incorporated by reference.

Background of the Invention

Field of the Invention

The present invention relates to information storage and display systems utilizing disk drives, and more particularly, to video recording systems that transfer both time-critical, error-tolerant streaming video data segments and non-time-critical, error-intolerant data segments.

Description of the Related Art

Hard disk drives complying with a standard known as ATA (Advanced Technology Attachment) are commonly used in non-audiovisual, computer-related applications which require a high level of accuracy for the data segments transferred between the disk drive and other system components. These non-audiovisual data segments are typically referred to as "information technology" or "IT" data segments. When a host processor sends an ATA data transfer command to the disk drive to transfer an IT data segment, the host processor requires a high level of accuracy for the IT data segment, *i.e.*, that the IT data segment be substantially free of errors. To ensure

1 the required level of accuracy for IT data segments written to the disk drive or
2 transmitted to the other system components, ATA read and write data transfer
3 commands to the disk drive typically require some disk-drive-resident error recovery, in
4 which the disk drive undertakes various error recovery procedures in an attempt to
5 transfer the IT data segment with no data transfer errors. These disk-drive-resident error
6 recovery procedures can include detection, identification, and correction procedures.

7 For example, these disk-drive-resident error recovery may include multiple
8 retries, or other 'heroic' efforts to ensure that the requested IT data segments have the
9 required level of accuracy. Depending on the success of the various retries or other
10 efforts, the disk-drive-resident error recovery may require additional time by the disk
11 drive, thereby possibly delaying the transfer of other data segments. Despite these
12 possible delays, it is generally acceptable in non-audiovisual applications to carry out
13 the disk-drive-resident error recovery to ensure the accuracy of the IT data segments
14 being written or transmitted. Therefore, the IT data segments can be described as non-
15 time-critical, error-intolerant data segments because their transfers may be delayed
16 without sacrificing system performance, but their transfers must not create errors which
17 would lower the level of accuracy of the data segments.

18 Audiovisual applications for audiovisual or "AV" data segments corresponding
19 to a video data stream have different requirements than do non-audiovisual applications.
20 Audiovisual applications place more importance on the predictability of AV data
21 transfer, while tolerating some loss in AV data accuracy. By their nature, AV data
22 segments must be continually transferred at a required data transfer rate. The required
23 data transfer rate for a video data stream is typically less than the maximum possible
24 data transfer rate for the disk drive, resulting in additional bandwidth available for the
25 concurrent transfer of additional data segments, some of which correspond to other
26 video data streams. Even a small delay in the transfer of an AV data segment can
27 deleteriously affect the system performance and can be quite noticeable to the user.
28 However, because each AV data segment is quickly replaced by the next AV data
29 segment, an error in a particular AV data segment would be nearly undetectable by the
30 user. Thus, AV data segments can be described as time-critical, error-tolerant data

1 segments because their transfers must not be delayed, but their transfers may create
2 errors which would lower the level of accuracy of the data segments.

3 Audiovisual applications are therefore enhanced by modifications to the
4 standard ATA data transfer command set for hard disk drive usage. One of these
5 modifications has been the introduction of data transfer command sets optimized for
6 audiovisual applications. For example, a document identified as "T13/D99128 revision
7 0" entitled "Proposal for Audio/Visual Feature Set" available from Western Digital
8 Corporation of Irvine, California, and a document identified as "T13D99123 revision 1"
9 entitled "Proposal for Streaming AV Commands" available from Seagate Technology of
10 Longmont, Colorado, both of which are incorporated by reference herein, propose
11 alternative data transfer command sets for the storage on hard disk drives of streaming
12 AV data and non-streaming IT data. These data transfer command sets add new
13 instructions to the standard ATA data transfer command set to guarantee the timely
14 transfer of AV data segments at the possible expense of the accuracy of the AV data
15 segments.

16 As described in the above-referenced "Proposal for Audio/Visual Feature Set"
17 from Western Digital Corporation, the "Streamweaver" data transfer command set
18 incorporates additional data transfer commands into the standard ATA data transfer
19 command set. These additional data transfer commands enable the host processor to
20 alter the disk drive parameters and functions related to AV data transfer by toggling the
21 disk drive between an AV mode and an IT mode. In the AV mode, the disk drive may
22 reconfigure resources to support the streaming requirement of the AV data segments,
23 and may set an upper limit on the total time devoted to error recovery in the event of a
24 data transfer error, thereby constraining any disk-drive-resident error recovery.
25 Similarly, in the IT mode, the disk drive may reconfigure resources to support the
26 accuracy requirement of the IT data segments. In addition, the "Streamweaver" data
27 transfer command set includes a "Read AV Stream" command and a "Write AV
28 Stream" command which require fewer disk-drive-resident error recovery procedures in
29 the event of a data transfer error than are required by the corresponding read and write
30 commands of the standard ATA data transfer command set. Having fewer disk-drive-

1 resident error recovery procedures is an effort to minimize the possibility of delaying
2 the transfer of other AV data segments.

3 When being used in a video recording system, such as a digital video recorder, a
4 disk drive is typically required to transfer streaming AV data segments concurrently
5 with IT data segments corresponding to information such as an electronic program
6 guide. In such a system, it is desirable that the disk drive transfer the IT data segments
7 with the required high accuracy in response to data transfer commands by the host
8 processor, while maintaining the required data transfer rate for the streaming AV data
9 segments. Because the required data transfer rate for a video data stream is typically
10 less than the maximum possible data transfer rate, there is usually sufficient bandwidth
11 remaining to transfer both the streaming AV data segments and the IT data segments.
12 However, due to the disk-drive-resident error recovery inherent in the standard read and
13 write commands of the ATA data transfer command set, use of the standard read and
14 write commands of the ATA command set for transferring the IT data segments may
15 potentially exceed the available time, thereby interrupting or delaying the streaming AV
16 data segments.

17 Summary of the Invention

18 The present invention may be regarded as a method of transferring a non-time-
19 critical, error-intolerant data segment stored on a disk drive, which is responsive to a set
20 of data transfer commands generated by a host processor and which is operating in a
21 mode optimized for transferring time-critical, error-tolerant streaming data segments
22 stored or to be stored on the disk drive. The method comprises sending a sequence of
23 data transfer commands generated by the host processor to the disk drive to transfer a
24 respective sequence of time-critical, error-tolerant streaming data segments at a required
25 data transfer rate. The method further comprises selectively interposing a first data
26 transfer command into the sequence of data transfer commands, the first data transfer
27 command initiating a first transfer of the non-time-critical, error-intolerant data segment
28 from a first storage location. The method further comprises transmitting a data transfer
29 error signal generated by the disk drive to the host processor, the data transfer error
30 signal having a state that indicates whether any data transfer errors have occurred with

1 respect to the first transfer of the non-time-critical, error-intolerant data segment. The
2 method further comprises selectively interposing a second data transfer command into
3 the sequence of data transfer commands, the second data transfer command initiating a
4 second transfer of the non-time-critical, error-intolerant data segment from a second
5 storage location, thereby utilizing storage redundancy to achieve an accuracy required
6 for the non-time-critical, error-intolerant data segment while maintaining the required
7 data transfer rate of the sequence of time-critical, error-tolerant data segments.

8 The present invention may also be regarded as a method of storing a non-time-
9 critical, error-intolerant data segment on a disk drive, which is responsive to a set of
10 data transfer commands generated by a host processor and which stores both time-
11 critical, error-tolerant data segments and non-time-critical, error-intolerant data
12 segments. The method comprises sending a first data transfer command generated by
13 the host processor to the disk drive to write the non-time-critical, error-intolerant data
14 segment on the disk drive. The method further comprises writing the non-time-critical,
15 error-intolerant data segment at a first storage location and writing the non-time-critical,
16 error-intolerant data segment at a second storage location different from the first storage
17 location.

18 The present invention may also be regarded as a method of transferring a non-
19 time-critical, error-intolerant data segment stored on a disk drive, which is responsive to
20 a set of data transfer commands generated by a host processor and which is operating in
21 a mode optimized for transferring time-critical, error-tolerant streaming data segments
22 stored or to be stored on the disk drive. The method comprises sending a sequence of
23 data transfer commands generated by the host processor to the disk drive to transfer a
24 respective sequence of time-critical, error-tolerant streaming data segments within a
25 data transfer bandwidth less than a maximum bandwidth for the disk drive. The method
26 further comprises selectively interposing a first data transfer command into the sequence
27 of data transfer commands, the first data transfer command initiating a first transfer of
28 the non-time-critical, error-intolerant data segment from a first storage location, the first
29 transfer of the non-time-critical, error-intolerant data segment occurring within a
30 remaining bandwidth that is a difference between the maximum bandwidth and the data

1 transfer bandwidth. The method further comprises transmitting a data transfer error
2 signal generated by the disk drive to the host processor, the data transfer error signal
3 having a state that indicates whether any data transfer errors have occurred with respect
4 to the first transfer of the non-time-critical, error-intolerant data segment. The method
5 further comprises selectively interposing a second data transfer command into the
6 sequence of data transfer commands, the second data transfer command initiating a
7 second transfer of the non-time-critical, error-intolerant data segment from a second
8 storage location, thereby utilizing storage redundancy to achieve an accuracy required
9 for the non-time-critical, error-intolerant data segment while maintaining the data
10 transfer bandwidth for the sequence of time-critical, error-tolerant data segments.

11 The present invention may also be regarded as a video recording system to
12 record and playback non-time-critical, error-intolerant data segments and time-critical,
13 error-tolerant streaming data segments using a disk drive responsive to a set of data
14 transfer commands and optimized for transferring time-critical, error-tolerant streaming
15 data segments at a required data transfer rate. The video recording system comprises a
16 user interface that receives user input, and a video input interface that receives an
17 external video data stream for a selected video program segment and that generates
18 time-critical, error-tolerant streaming data segments. The video recording system
19 further comprises a video output interface that is connectable to a display device, and a
20 data management system. The data management system comprises at least one data
21 buffer that receives, stores, and transmits time-critical, error-tolerant streaming data
22 segments. The data management system further comprises a host processor that
23 generates a sequence of data transfer commands sent to the disk drive to transfer a
24 respective sequence of time-critical, error-tolerant streaming data segments at the
25 required data transfer rate. The host processor also selectively interposes a first data
26 transfer command into the sequence of data transfer commands, the first data transfer
27 command initiating a first transfer of a non-time-critical, error-intolerant data segment
28 from a first storage location. The host processor also receives a data transfer error
29 signal generated by the disk drive, the data transfer error signal having a state that
30 indicates whether any data transfer errors have occurred in the first transfer of the non-

1 time-critical, error-intolerant data segment. The host processor also selectively
2 interposes a second data transfer command into the sequence of data transfer
3 commands, the second data transfer command initiating a second transfer of the non-
4 time-critical, error-intolerant data segment from a second storage location, thereby
5 utilizing storage redundancy to achieve an accuracy required for the non-time-critical,
6 error-intolerant data segment while maintaining the required data transfer rate of the
7 sequence of time-critical, error-tolerant streaming data segments.

8 Brief Description of the Drawings

9 Figure 1 schematically illustrates a video recording system in accordance with
10 an embodiment of the present invention to record and playback non-time-critical, error-
11 intolerant data segments and time-critical, error-tolerant streaming data segments.

12 Figures 2a-2e schematically illustrate the AV data buffer and its first and second
13 buffer sections at various stages during the streaming of AV data segments.

14 Figure 3a schematically illustrates two command buffers of the data
15 management system with one data transfer command for AV data segments and one
16 data transfer command for IT data segments.

17 Figure 3b schematically illustrates two command buffers of the data
18 management system with one data transfer command for IT data segments, the data
19 transfer command corresponding to writing an IT data segment to the disk drive.

20 Figure 3c schematically illustrates two command buffers of the data
21 management system with one data transfer command for IT data segments, the data
22 transfer command corresponding to reading an IT data segment from the disk drive.

23 Figure 4 is a flowchart that schematically illustrates a method of transferring an
24 IT data segment stored on the disk drive while transferring a sequence of AV data
25 segments at a required data transfer rate, the method achieving an accuracy required for
26 the IT data segment while maintaining the required data transfer rate of the sequence of
27 AV data segments.

28 Figure 5 schematically illustrates a platter surface used to read and write to first
29 and second storage locations to transfer an IT data segment.

Figure 6 is a flowchart that schematically illustrates one embodiment of a host-processor-resident error recovery procedure that is compatible with the present invention.

Figures 7a-7c schematically illustrate various sequences of data transfer commands for both AV data segments and IT data segments, the sequences being compatible with the present invention.

Detailed Description of the Preferred Embodiment

Figure 1 schematically illustrates a video recording system 10 in accordance with an embodiment of the present invention to record and playback non-time-critical, error-intolerant data segments ("IT data segments") 12 and time-critical, error-tolerant streaming data segments ("streaming AV data segments") 14. The video recording system 10 comprises a user interface 20 that receives user input 22 and that generates IT data segments 12, a video input interface 30 that receives an external video data stream 32 for a selected video program segment and that generates a sequence of streaming AV data segments 14, an electronic program guide ("EPG") interface 40 that receives EPG information 42 and that generates IT data segments 12, a video output interface 50 that is connectable to a display device 52, a disk drive 60, and a data management system 70. The disk drive 60 is responsive to a set of data transfer commands and is optimized for transferring streaming AV data segments 14 at a required data transfer rate.

The data management system 70 of the preferred embodiment of the present invention comprises at least one AV data buffer 72 that receives, stores, and transmits streaming AV data segments 14. In the preferred embodiment, the data management system 70 further comprises at least one IT data buffer 75 that receives, stores, and transmits IT data segments 12, and a plurality of command buffers 76a, 76b, etc., that temporarily receive, store, and transmit data transfer commands. In embodiments with more than one AV data buffer, each AV data buffer 72a, 72b, etc., is used in conjunction with a separate sequence of streaming AV data segments 14 corresponding to a separate video data stream. In embodiments with more than one IT data buffer, each IT data buffer 75a, 75b, etc., is used in conjunction with a separate set of IT data segments 12. Each command buffer 76a, 76b, etc., is used in conjunction with a

1 separate set of data transfer commands corresponding to either transferring a separate
2 sequence of streaming AV data segments 14 or transferring a separate set of IT data
3 segments 12.

4 The data management system 70 further comprises a host processor 80 that
5 generates a sequence of data transfer commands sent to the disk drive 60 to transfer a
6 respective sequence of streaming AV data segments 14 at the required data transfer rate.
7 The host processor 80 also selectively interposes a first data transfer command into the
8 sequence of data transfer commands, the first data transfer command initiating a first
9 transfer of an IT data segment 12. The host processor 80 also receives a data transfer
10 error signal generated by the disk drive 60, the data transfer error signal having a state
11 that indicates whether any data transfer errors have occurred in the first transfer of the
12 IT data segment 12. The host processor 80 also selectively initiates host-processor-
13 resident error recovery in response to the state of the data transfer error signal to achieve
14 an accuracy required for the IT data segment 12 while maintaining the required data
15 transfer rate of the sequence of streaming AV data segments 14.

16 By receiving user input 22, the user interface 20 permits the user to indicate to
17 the video recording system 10 which video program segments are selected for recording
18 from the external video data stream 32, as well as to control various other operation
19 parameters of the video recording system 10, such as playback commands (*e.g.*, pause,
20 instant-replay, *etc.*). The user interface 20 can comprise a remote control keypad
21 device, or a keypad wired directly to the video recording system 10. In response to the
22 user input 22, the user interface 20 generates IT data segments 12 which are transmitted
23 to the data management system 70. Persons skilled in the art are able to select an
24 appropriate communication technology for the user interface 20 in accordance with the
25 present invention.

26 In one embodiment of the present invention, the video input interface 30
27 receives an external video data stream 32 from a multiple-service operator ("MSO").
28 MSOs are video data service providers that supply video programming to multiple
29 users. Examples of MSOs include, but are not limited to, cable television systems and

1 satellite systems. Alternatively, the external video data stream 32 can be received from
2 UHF or VHF broadcast signals using an antenna.

3 The video input interface 30 is configured to respond to the external video data
4 stream 32 by generating streaming AV data segments 14 with a format which is
5 compatible with the data management system 70 and other components of the video
6 recording system 10. For example, to provide compatibility of the video recording
7 system 10 with an analog-formatted external video data stream 32, the video input
8 interface 30 of one embodiment comprises an MPEG (Motion Pictures Experts Group)
9 encoder, which generates compressed digitally-formatted streaming AV data segments
10 14 in response to the analog-formatted external video data stream 32, and communicates
11 the compressed digitally-formatted streaming AV data segments 14 to the data
12 management system 70. Furthermore, for particular embodiments that are compatible
13 with an encrypted external video data stream 32 (*e.g.*, video data streams from premium
14 cable channels), the video input interface 30 comprises a decrypter. Alternatively, in
15 other embodiments of the present invention, the encoding and decrypting features
16 described above may instead be performed by the data management system 70, or by
17 some other device upstream of the video recording system 10. Persons skilled in the art
18 are able to provide a video input interface 30 that receives and appropriately responds to
19 the external video data stream 32 by generating streaming AV data segments 14 in a
20 manner in accordance with the present invention.

21 In the preferred embodiment of the present invention, the electronic program
22 guide (“EPG”) interface 40 receives the EPG information 42 and in response generates
23 IT data segments 12 that are transmitted to the data management system 70. In the
24 embodiment illustrated in Figure 1, the EPG information 42 is a database containing
25 information regarding the broadcast schedules for various video program segments from
26 various broadcast channels. This information is typically expressed in the form of a
27 program grid with columns denoting the time periods, and with separate rows for each
28 of the available broadcast channels. In one embodiment, the EPG information 42 is
29 generated by a separate source from that of the external video data stream 32, and the
30 EPG interface 40 is a separate interface (*e.g.*, a phone line connection interface) from

1 the video input interface 30. Alternatively, in other embodiments of the present
2 invention where the EPG information 42 is generated by the same source as that of the
3 external video data stream 32 and transmitted along with the external video data stream
4 32, the EPG interface 40 is part of the video input interface 30. Typically, in order to
5 enable a user to utilize the EPG information 42, the video recording system 10 displays
6 the program grid directly on the display device 52 being viewed by the user. The user
7 may then provide appropriate user input 22 to the data management system 70 via the
8 user interface 20. The data management system 70 then uses the EPG information 42 to
9 select the external video data stream 32 for the video program segment in response to
10 the user input 22. Persons skilled in the art are able to select an appropriate
11 configuration of the EPG interface 40 and to select the method of communicating the
12 EPG information 42 to both the user and the data management system 70 compatible
13 with the present invention.

14 The video output interface 50 is coupled to the data management system 70 and
15 receives IT data segments 12 and streaming AV data segments 14. The video output
16 interface 50 is also coupled to a display device 52, which in the preferred embodiment
17 of the present invention is a television. In response to the received data segments, the
18 video output interface 50 generates a video data stream that is compatible with the
19 display device 52. Alternatively, the video output interface 50 can receive video data
20 streams directly from the data management system 70. Persons skilled in the art are
21 able to select an appropriate configuration of the video output interface 50 compatible
22 with the present invention.

23 The disk drive 60 is coupled to the data management system 70 and provides
24 storage for both IT data segments 12 and streaming AV data segments 14. In the
25 preferred embodiment of the present invention, the disk drive 60 is compatible with the
26 ATA standard. In other embodiments, the disk drive 60 is compatible with the SCSI
27 (Small Computer System Interface) standard. In still other embodiments, the disk drive
28 60 is compatible with the IEEE 1394 standard, which is described in the "IEEE Std
29 1394-1995 IEEE Standard for a High Performance Serial Bus," August 30, 1996, which
30 is incorporated by reference herein. Alternatively, the disk drive 60 can be a writable

1 digital video disk (DVD) drive, or another technology that provides writable non-
2 volatile storage.

3 In embodiments in which the disk drive 60 is an ATA disk drive, the host
4 processor 80 maintains a directory of the physical locations of the various data segments
5 stored on the disk drive 60. Typically, this information is in the form of a file allocation
6 table that contains a list of file names and the linked clusters for each file name. The
7 file allocation table can also indicate whether each file name signifies either IT data
8 segments 12 or streaming AV data segments 14. In other embodiments, the host
9 processor 80 instead maintains a directory of logical locations that the disk drive 60
10 translates into physical locations.

11 The disk drive 60 of the preferred embodiment is responsive to the
12 "Streamweaver" set of data transfer commands which incorporates additional data
13 transfer commands beyond those found in the standard ATA data transfer command set.
14 These additional data transfer commands are designed for transferring data segments
15 stored or to be stored on the disk drive 60 while maintaining a required data transfer rate
16 for transferring streaming AV data segments 14.

17 The various parameters and functions of the disk drive 60, such as a disk-drive-
18 resident error recovery time limit, can be toggled between an AV mode and an IT mode
19 by the "Set AV Configuration" command generated by the host processor 80. When
20 placed in the AV mode, as in the preferred embodiment of the present invention, the
21 disk drive 60 is optimized for transferring streaming AV data segments 14 at a required
22 data transfer rate. Upon receiving a "Read AV Stream" or a "Write AV Stream"
23 command, the disk drive 60 does not perform disk-drive-resident error recovery in the
24 event of a data transfer error. Alternatively, in other embodiments, the disk drive 60 can
25 perform some disk-drive-resident error recovery procedures; however, the total time
26 allotted for these procedures is limited by the disk-drive-resident error recovery time
27 limit. Note that while the names of these additional data transfer commands in the
28 "Streamweaver" data transfer command set refer to "AV Stream," these data transfer
29 commands may also be invoked to transfer IT data segments 12.

1 Upon each transfer of a data segment, the disk drive 60 generates a data transfer
2 error signal which is transmitted to the host processor 80. Each data transfer error
3 signal has a plurality of states indicative of whether any data transfer errors have
4 occurred or not with respect to the corresponding transfer of the data segment. In the
5 preferred embodiment of the present invention, when a data transfer error occurs, the
6 corresponding data transfer error signal is in a first state indicative of the data transfer
7 error occurrence. When a data transfer error has not occurred, the corresponding data
8 transfer error signal is in a second state indicative of no data transfer error occurrence.
9 In other embodiments, the state of the data transfer error signal can also indicate other
10 aspects of the data transfer error, such as the type of data transfer error or the portion of
11 the data segment affected by the data transfer error.

12 The AV data buffer 72 of the preferred embodiment is coupled to the host
13 processor 80 and the disk drive 60, and is used to continuously transfer streaming AV
14 data segments 14 between the disk drive 60 and the host processor 80 or other
15 components of the video recording system 10. Data streaming rates for continuously
16 streaming video data (*e.g.*, 1 Mb/s) are typically much lower than the instantaneous data
17 transfer rates for transferring data segments from disk drives (*e.g.*, 66 Mb/s). The AV
18 data buffer 72 thus serves as a temporary repository of streaming AV data segments 14
19 in order to maintain a data streaming rate that is lower than the instantaneous data
20 transfer rate.

21 Figures 2a-2e provide an illustrative example of an AV data buffer 72
22 compatible with an embodiment of the present invention, in which the AV data buffer
23 72 is used to generate a video data stream originating from a sequence of streaming AV
24 data segments 14 from the disk drive 60. The hatched regions denote portions of the
25 AV data buffer 72 which contain AV data segments 14. The AV data buffer 72 is a
26 “ping-pong” buffer which comprises first and second buffer sections 73, 74, each with a
27 capacity of 300 Kb. At an instantaneous data transfer rate of 66 Mb/s, 100 Kb of data
28 segments can be transferred or “burst” into the AV data buffer 72 from the disk drive 60
29 in approximately 1.5 ms, thereby taking approximately 4.5 ms to fill each 300 Kb buffer
30 section. Figure 2a illustrates the AV data buffer 72 after two bursts of data segments

1 into the first buffer section 73. The AV data buffer 72 is prepared to receive a third
2 burst of data segments, and some of the previously-stored data segments have been
3 streamed out of the first buffer section 73 at the data streaming rate of 1 Mb/s.

4 At a data streaming rate of 1 Mb/s, it takes 300 ms to completely empty the first
5 buffer section 73. During this 300 ms, the second buffer section 74 is similarly filled in
6 approximately 4.5 ms. Figure 2b illustrates the AV data buffer 72 prepared to receive
7 bursts of AV data segments 14 in the second buffer section 74 after the first buffer
8 section 73 has been filled. Figure 2c illustrates the AV data buffer 72 after the second
9 buffer section 74 is completely filled and the first buffer section 73 continues to provide
10 streaming AV data segments 14 at 1 Mb/s.

11 Upon completely emptying the first buffer section 73, data segments are
12 streamed out of the second buffer section 74 at the same data streaming rate of 1 Mb/s,
13 as illustrated in Figure 2d. As illustrated in Figure 2e, before the second buffer section
14 74 is completely emptied, the AV data buffer 72 is again prepared to receive bursts of
15 AV data segments 14 in the first buffer section 73. After the second buffer section 74 is
16 completely emptied, data segments are once again streamed out of the first buffer
17 section 73, as illustrated in Figure 2a. This “ping-pong”-like switching between the first
18 and second buffer sections 73, 74 enables the AV data buffer 72 to generate a video data
19 stream that originates from a sequence of streaming AV data segments 14 from the disk
20 drive 60. Note that the intermittent bursting of data segments into the AV data buffer
21 72 at the instantaneous data transfer rate yields an average data transfer rate, or required
22 data transfer rate, which equals the data streaming rate.

23 Data transfer commands 82 for AV data segments (discussed below in reference
24 to Figures 3a, 4, and 6) are data transfer commands which initiate the transfer of AV
25 data segments 14 into the AV data buffer 72. Similarly, data transfer commands 84 for
26 IT data segments (discussed below in reference to Figures 3a, 3b, 4, 5, and 6) are data
27 transfer commands which initiate the transfer of IT data segments 12 into the IT data
28 buffer 75. The data transfer commands 82 for AV data segments are not carried out at
29 any particular moment during the streaming of the AV data segments 14. However, to
30 avoid interrupting the streaming video data due to completely emptying or overfilling

1 the AV data buffer 72, a sequence of data transfer commands 82 for AV data segments
2 generated by the host processor 80 is sent to the disk drive 60 to transfer a respective
3 sequence of streaming AV data segments 14 at a required data transfer rate which equals
4 the data streaming rate. By maintaining the required data transfer rate, each buffer
5 section 73, 74 of the AV data buffer 72 receives streaming AV data segments 14 from
6 the disk drive 60 before completely emptying. In addition, by maintaining the required
7 data transfer rate, the AV data buffer 72 transmits streaming AV data segments 14 to the
8 disk drive 60 before either buffer section 73, 74 of the AV data buffer 72 is completely
9 filled. In this way, the preferred embodiment of the present invention, avoids the
10 interruption of video data streams due to an empty AV data buffer 72, and avoids the
11 loss of AV data segments due to an overfilled AV data buffer 72.

12 In other embodiments with multiple AV data buffers 72a, 72b, etc., a second AV
13 data buffer can be used to concurrently store a second video data stream onto the disk
14 drive 60 by continually receiving streaming video data, and intermittently transferring
15 the corresponding data segments to the disk drive 60. Persons skilled in the art
16 recognize that other configurations of the AV data buffer 72 is compatible with the
17 present invention.

18 The IT data buffer 75 of the preferred embodiment temporarily stores IT data
19 segments 12 to be used by the host processor 80. These IT data segments 12 can be
20 received from the user interface 20, EPG interface 40, or disk drive 60. In addition, the
21 IT data segments 12 can be generated by the host processor 80 in response to other data
22 segments. Persons skilled in the art can provide an appropriate configuration of the IT
23 data buffer 75 compatible with the present invention.

24 The command buffers 76a, 76b, etc., serve as temporary repositories of data
25 transfer commands generated by the host processor 80 before they are issued to the disk
26 drive 60. Each command buffer 76a, 76b, etc., is used either for data transfer
27 commands 84 for transferring IT data segments or for data transfer commands 82 for
28 transferring AV data segments. In an alternative embodiment, only one command
29 buffer 76 can be used for data transfer commands for either type of data segment. As
30 illustrated in Figures 3a, 3b, and 3c, each command buffer 76a, 76b, etc., can store

1 multiple data transfer commands concurrently. In other embodiments, each command
2 buffer 76a, 76b, etc., can store only one data transfer command at one time.

3 In the preferred embodiment of the present invention, the host processor 80 is a
4 microprocessor that contains the operating system of the data management system 70.
5 The host processor 80 also performs various functions in response to IT data segments
6 12 and streaming AV data segments 14 generated by other components of the video
7 recording system 10. Data transfer commands are selectively generated by the host
8 processor 80, temporarily stored in the command buffers 76a, 76b, etc., and selectively
9 transmitted to the disk drive 60. IT data segments 12 are selectively routed by the host
10 processor 80 to the IT data buffer 75 and the disk drive 60. In addition, the host
11 processor 80 can generate IT data segments 12 in response to other data segments it
12 receives. Streaming AV data segments 14 received from the video input interface 30
13 and the disk drive 60 are temporarily stored in the AV data buffer 72 and selectively
14 transmitted to the disk drive 60 and the video output interface 50.

15 Data transfer commands are selectively generated by the host processor 80 and
16 temporarily stored in command buffers 76a, 76b, etc., in response to the data
17 requirements of the data management system 70 based on user input 22, EPG
18 information 42, status of the AV data buffer 72 and IT data buffer 75, and various other
19 system parameters. These data transfer commands can be either data transfer
20 commands 82 for AV data segments or data transfer commands 84 for IT data segments.
21 In the preferred embodiment of the present invention, both data transfer commands 82
22 for AV data segments and data transfer commands 84 for IT data segments are either
23 "Read AV Stream" or "Write AV Stream" commands, which do not perform any disk-
24 drive-resident error recovery. For example, the user can select to view on the display
25 device 52 a continuous stream of video data based on data segments previously stored
26 on the disk drive 60. Similarly, the user may request that an incoming stream of video
27 data be stored onto the disk drive 60. In both of these circumstances, the host processor
28 80 generates a sequence of data transfer commands 82 for AV data segments
29 corresponding to a respective sequence of streaming AV data segments 14. Each of
30 these data transfer commands 82 for AV data segments is temporarily stored in the

1 appropriate command buffer 76a. Figure 3a schematically illustrates a command buffer
2 76a containing a data transfer command 82 for AV data segments to read such a
3 streaming AV data segment 14 from the disk drive 60.

4 In addition, concurrent with the transferring of the streaming AV data segments
5 14, the data management system 70 is typically requested to also transfer IT data
6 segments 12. For example, EPG information 42 may be stored on, or retrieved from,
7 the disk drive 60 during the continuous streaming of video data corresponding to the
8 sequence of streaming AV data segments 14. Under these circumstances, the host
9 processor 80 generates a first data transfer command 84 for IT data segments and
10 temporarily stores the first data transfer command 84 for IT data segments in the
11 appropriate command buffer 76b. When it is eventually sent to the disk drive 60, the
12 first data transfer command 84 for IT data segments initiates a first transfer of a
13 requested IT data segment 12. Figures 3a and 3b schematically illustrate a command
14 buffer 76b containing a first data transfer command 84 to write such a requested IT data
15 segment 12 to the disk drive 60. Figure 3c schematically illustrates a command buffer
16 76b containing a first data transfer command 84 for IT data segments to read such a
17 requested IT data segment 12 from the disk drive 60.

18 Figure 4 is a flowchart which illustrates the preferred embodiment of the present
19 invention of a method 200 of transferring an IT data segment 12 stored on the disk drive
20 60. As described above, the disk drive 60 utilized by the method 200 is responsive to a
21 set of data transfer commands from the host processor 80, and the disk drive 60 is
22 operating in a mode optimized for transferring streaming AV data segments 14 stored or
23 to be stored on the disk drive 60. The method 200 illustrated in Figure 4 achieves an
24 accuracy required for the IT data segment 12 while maintaining the required data
25 transfer rate of a sequence of streaming AV data segments 14. The following discussion
26 is made in reference to the data transfer commands illustrated in Figures 3a, 3b, and 3c
27 for either writing or reading the IT data segment 12 while reading a sequence of
28 streaming AV data segments 14 from the disk drive 60. However, persons skilled in the
29 art are able to recognize that the preferred embodiment of the present invention is also

1 compatible with the transfer of an IT data segment 12 while writing a sequence of
2 streaming AV data segments 14 to the disk drive 60.

3 As described above, the transfer of the sequence of streaming AV data segments
4 14 has priority over the transfer of the IT data segment 12 in order to maintain the
5 required data transfer rate for the sequence of streaming AV data segments 14. This
6 required data transfer rate is maintained by selectively interposing a first data transfer
7 command 84 for IT data segments into the sequence of data transfer commands 82 for
8 AV data segments. As shown in Figure 4, in a decision block 210, the data
9 management system 70 first evaluates whether there is a data transfer command 82 for
10 AV data segments in the command buffer 76a. If there is such a data transfer command
11 82 for AV data segments, as there is in Figure 3a, then in a procedure block 220, the
12 data management system 70 transmits the data transfer command 82 for AV data
13 segments to the disk drive 60, which responds by reading the requested streaming AV
14 data segment 14. After waiting for the completion of the data transfer command 82 for
15 AV data segments, the data management system 70 then again evaluates, in a decision
16 block 210, whether there is a data transfer command 82 for AV data segments in the
17 command buffer 76a.

18 If there is no such data transfer command 82 for AV data segments in the
19 command buffer 76a, as illustrated in Figure 3b, then the data management system 70
20 evaluates, in a decision block 230, whether there is a pending host-processor-resident
21 error recovery corresponding to a previously-performed data transfer command 84 for
22 IT data segments. As described below, a host-processor-resident error recovery is
23 pending after a data transfer error occurs with respect to the transfer of an IT data
24 segment 12. The pendency of a host-processor-resident error recovery with respect to
25 an IT data segment 12 is indicated in the preferred embodiment by an error status signal
26 of the data management system 70; however, other embodiments can use alternative
27 indications.

28 If the error status signal indicates that there is a pending host-processor-resident
29 error recovery corresponding to a previously-performed data transfer command 84 for
30 IT data segments, then the data management system 70 continues the pending host-

processor-resident error recovery by performing a host-processor-resident error recovery procedure 240. As will be described below, host-processor-resident error recovery can comprise various procedures initiated by the host processor in an attempt to re-transfer the requested IT data segment 12 without a data transfer error. However, the host-processor-resident error recovery procedure only takes a limited amount of time to perform in order to not delay any subsequent data transfer commands 82 for AV data segments. After waiting for the completion of the host-processor-resident error recovery procedure 240, the data management system 70 then again evaluates, in a decision block 210, whether there is a data transfer command 82 for AV data segments in the command buffer 76a.

If host-processor-resident error recovery for an IT data segment 12 is not pending, then the data management system 70 evaluates, in a decision block 250, whether there is a first data transfer command 84 for IT data segments for initiating a first transfer of an IT data segment 12 in the command buffer 76b. If there is no such first data transfer command 84 for IT data segments, then the data management system 70 again evaluates, in a decision block 210, whether there is a data transfer command 82 for AV data segments in the command buffer 76a.

If the command buffer 76b does contain a first data transfer command 84 for IT data segments for initiating a transfer of an IT data segment 12, as illustrated in Figure 3b, then in a procedure block 260, the data management system 70 transmits the first data transfer command 84 for IT data segments to the disk drive 60, which responds by writing the IT data segment 12 to both a first storage location 90 and a second storage location 92. The second storage location 92 is a redundant storage location, which in certain embodiments, is at a predetermined position relative to the first storage location 90. The second storage location 92 can later be accessed in the event of a failed transfer of the IT data segment 12 from the first storage location 90.

As illustrated in Figure 5, the disk drive 60 of the preferred embodiment of the present invention comprises a disk surface 62 with an AV area 63, an IT primary area 64, and an IT redundant area 65. AV data segments are preferably stored exclusively on the AV area 63. The first storage location 90 is located on the IT primary area 64, and

1 the second storage location 92 is located on the IT redundant area 65. . With this
2 configuration, the IT data segment 12 is stored on both the IT primary area 64 and the
3 IT redundant area 65. In one embodiment, the second storage location 92 may have a
4 predetermined relation to the first storage location 90. While Figure 5 illustrates only
5 one disk surface 62, in other embodiments, multiple disks or multiple disk surfaces may
6 be used. Other embodiments can place the second storage location 92 at a position
7 which does not have a predetermined relation to the first storage location 90. In certain
8 embodiments, the disk surface 62 is not divided into separate areas for AV, IT primary,
9 or IT redundant data.

10 If the command buffer 76b contains a first data transfer command 84 for IT data
11 segments for initiating reading an IT data segment 12 from the disk drive 60, as
12 illustrated in Figure 3c, then in the procedure block 260, the data management system
13 70 transmits the first data transfer command 84 for IT data segments to the disk drive
14 60, which responds by reading the requested IT data segment 12 from the first storage
15 location 90. Upon completion of the first data transfer command 84 for IT data
16 segments, the disk drive 60 generates, in a procedure block 270, a data transfer error
17 signal which is transmitted to the host processor 80. As described above, the data
18 transfer error signal of the preferred embodiment has a first state that indicates a data
19 transfer error has occurred with respect to the first transfer of the IT data segment 12, or
20 a second state that indicates that no data transfer error has occurred with respect to the
21 first transfer of the IT data segment 12.

22 The host processor 80 then evaluates, in a decision block 280, the state of the
23 data transfer error signal to determine whether a data transfer error has occurred with
24 respect to the first transfer of the IT data segment 12. If the data transfer error signal is
25 in the second state, then the IT data segment 12 was successfully read with no data
26 transfer error, and the data management system 70 again evaluates, in a decision block
27 210, whether there is a data transfer command 82 for AV data segments in the command
28 buffer 76a. If the data transfer error signal is in the first state, then a data transfer error
29 occurred with respect to the transfer of the IT data segment 12 and the error status signal
30 of the data management system 70 is set, in a procedure block 290, to indicate the

pendancy of a host-processor-resident error recovery with respect to the IT data segment 12. Also, an error counter is set, in a procedure block 292, to indicate one data transfer error with respect to the IT data segment 12. The data management system 70 then again evaluates, in a decision block 210, whether there is a data transfer command 82 for AV data segments in the command buffer 76a.

In the preferred embodiment of the present invention, when performing the procedure 240, the host-processor-resident error recovery comprises re-trying the transfer of the requested IT data segment 12 to read the requested IT data segment 12 from the disk drive 60 without a data transfer error. As illustrated in Figure 6, when the error status signal indicates a pending host-processor-resident error recovery in relation to the IT data segment 12, the host processor 80 transmits, in a procedure block 300, a second data transfer command 84' for IT data segments (discussed below in relation to Figure 7c) that initiates a second transfer of the IT data segment 12.

The particular host-processor-resident error recovery procedure 240 performed by the preferred embodiment of the present invention depends on whether the failed data transfer command 84 for IT data segments was a read command or a write command. When the failed first data transfer command 84 for IT data segments is a write command to write the IT data segment 12 onto the disk drive 60, the second data transfer command 84' for IT data segments transmitted in procedure block 300 is a write command that initiates a second write of the IT data segment 12 to the same location on the disk drive 60 as for the first data transfer command 84 of IT data segments. For example, for a failed data transfer command 84 for IT data segments to write the IT data segment 12 to the first storage location 90, the second data transfer command 84' for IT data segments is a command to re-write the IT data segment 12 to the first storage location 90. Alternatively, in other embodiments, the second data transfer command 84' for IT data segments is a command to write the IT data segment 12 to a third storage location 94 which is later used in the event of a data transfer error from a data transfer command to read the IT data segment 12.

When the failed first data transfer command 84 for IT data segments is a read command to read the IT data segment 12 from the first storage location 90 on the disk

1 drive 60, the second data transfer command 84' for IT data segments transmitted in
2 procedure block 300 is a read command that initiates a second transfer of the IT data
3 segment 12 from the second storage location 92. In this way, the preferred embodiment
4 of the present invention utilizes the storage redundancy provided by the second storage
5 location 92 to achieve an accuracy required for the IT data segment 12.

6 Upon completion of the second data transfer command 84' for IT data segments,
7 the disk drive 60 generates, in a procedure block 310, a data transfer error signal which
8 is transmitted to the host processor 80. The host processor 80 then evaluates, in a
9 decision block 320, the state of the data transfer error signal to determine whether a data
10 transfer error has occurred with respect to the second transfer of the IT data segment 12.

11 If the data transfer error signal is in the second state, then the IT data segment 12
12 was successfully transferred with no data transfer error, and the data management
13 system 70 sets, in a procedure block 330, the error status signal to indicate that there is
14 no pending host-processor-resident error recovery with respect to the IT data segment
15 12. After resetting the error counter to zero in a procedure block 332, the data
16 management system 70 again evaluates, in a decision block 210, whether there is a data
17 transfer command 82 for AV data segments in the command buffer 76a.

18 If the data transfer error signal is in the first state, then a data transfer error
19 occurred again with respect to the transfer of the IT data segment 12 and the error
20 counter is incremented by one in a procedure block 340, and the data management
21 system 70 evaluates, in a decision block 350, whether the number of re-tries of the
22 transfer of the IT data segment 12 is above a pre-determined limit. If the error counter
23 indicates a number of errors below the pre-determined limit, then the data management
24 system 70 again evaluates, in a decision block 210, whether there is a data transfer
25 command 82 for AV data segments in the command buffer 76a.

26 If the error counter indicates a number of errors above the pre-determined limit,
27 then the host-processor-resident error recovery corresponding to the IT data segment 12
28 has totally failed and the data management system 70 responds appropriately. In the
29 preferred embodiment, this appropriate response comprises generating an error message,
30 in a procedure block 352, which is transmitted to the user, setting the error status signal,

1 in a procedure block 354, to indicate no pending host-processor-resident error recovery
2 with respect to the IT data segment 12, and resetting the error counter to zero in a
3 procedure block 356. The data management system 70 then again evaluates, in a
4 decision block 210, whether there is a data transfer command 82 for AV data segments
5 in the command buffer 76a. Other embodiments may respond differently to the total
6 failure of the host-processor-resident error recovery, including the utilization of
7 alternative error recovery procedures.

8 As described above, the preferred embodiment of the present invention
9 transmits, in a procedure block 220, any data transfer commands 82 for AV data
10 segments before transmitting, in a procedure block 250, any data transfer commands 84
11 for IT data segments. In this way, the preferred embodiment sends a sequence of data
12 transfer commands generated by the host processor to the disk drive to transfer a
13 respective sequence of streaming AV data segments 14 at a required data transfer rate.
14 Where there are no data transfer commands 84 for IT data segments in the command
15 buffer 76b, this sequence 82 of data transfer commands 82 for AV data segments is
16 illustrated in Figure 7a. Similarly, as illustrated in Figure 7b, certain embodiments
17 maintain multiple sequences 83, 85 of data transfer commands 82, 86 for AV data
18 segments to transfer respective sequences of streaming AV data segments 14 at the
19 required data transfer rate. In such circumstances, the data transfer bandwidth of the
20 first stream of AV data segments 14, transferred by the first sequence 83 of data transfer
21 commands ("AV1") 82, is less than the maximum bandwidth for the disk drive 60. The
22 multiple sequences 83, 85 correspond to multiple video data streams, either read from or
23 written to the disk drive 60. As illustrated in Figure 7b, the streaming of the second
24 stream of AV data segments 14, transferred by the second sequence 85 of data transfer
25 commands ("AV2") 86, occurs within a remaining bandwidth that is a difference
26 between the maximum bandwidth and the data transfer bandwidth for the first stream of
27 AV data segments 14.

28 As illustrated in Figure 7c, the preferred embodiment also selectively interposes
29 a first data transfer command 84 for IT data segments into the sequence 83 of data
30 transfer commands 82 for AV data segments by transmitting, in the procedure block

1 260, the first data transfer command 84 for IT data segments to the disk drive 60 only
2 when there are no data transfer commands 82 for AV data segments in the command
3 buffer 76a. In Figure 7c, the first transfer of the IT1 data segment 12 resulted in a data
4 transfer error, as indicated by the data transfer error signal generated by the disk drive
5 60 in the procedure block 270. By evaluating the data transfer error signal, the host
6 processor 80 is able to selectively initiate host-processor-resident error recovery. In the
7 preferred embodiment of the present invention, the host-processor-resident error
8 recovery comprises transmitting a second data transfer command 84' for IT data
9 segments for the same IT1 data segment 12 to the disk drive 60 in the procedure block
10 300, which in Figure 7c also results in a data transfer error. However, because a data
11 transfer command 82 for AV data segments is found by the data management system 70
12 in the AV data buffer 72, the third data transfer command 84'' for IT data segments,
13 corresponding to a second retry of transferring the IT1 data segment 12, is delayed until
14 after the data transfer command 82 for AV data segments is completed. In Figure 7c,
15 this second retry of the transfer of the IT1 data segment is successful.

16 When the reading of the IT data segment 12 from the first storage location 90
17 initiated by the data transfer command 84 for IT data segments results in a data transfer
18 error, the data management system 70 selectively interposes a second data transfer
19 command 84' for IT data segments into the sequence 83 of data transfer commands 82
20 for AV data segments. The second data transfer command 84' for IT data segments
21 initiates a second transfer of the IT data segment 12 from the second storage location
22 92, thereby utilizing storage redundancy to achieve an accuracy required for the IT data
23 segments 12 while maintaining the required data transfer rate for the sequence of
24 streaming AV data segments 14. As illustrated in Figure 7c, the process continues to
25 provide transfer of other IT data segments IT2 (using a data transfer command 87 for IT
26 data segments which succeeds on the first attempt), and IT3 (using a data transfer
27 command 88 for IT data segments which fails, and a first retry utilizing a data transfer
28 command 88' for IT data segments which succeeds).

WHAT IS CLAIMED IS:

1. A method of transferring a non-time-critical, error-intolerant data segment stored on a disk drive, which is responsive to a set of data transfer commands generated by a host processor and which is operating in a mode optimized for transferring time-critical, error-tolerant streaming data segments stored or to be stored on the disk drive, the method comprising:

 sending a sequence of data transfer commands generated by the host processor to the disk drive to transfer a respective sequence of time-critical, error-tolerant streaming data segments at a required data transfer rate;

 selectively interposing a first data transfer command into the sequence of data transfer commands, the first data transfer command initiating a first transfer of the non-time-critical, error-intolerant data segment from a first storage location;

 transmitting a data transfer error signal generated by the disk drive to the host processor, the data transfer error signal having a state that indicates whether any data transfer errors have occurred with respect to the first transfer of the non-time-critical, error-intolerant data segment; and

 selectively interposing a second data transfer command into the sequence of data transfer commands, the second data transfer command initiating a second transfer of the non-time-critical, error-intolerant data segment from a second storage location, thereby utilizing storage redundancy to achieve an accuracy required for the non-time-critical, error-intolerant data segment while maintaining the required data transfer rate of the sequence of time-critical, error-tolerant streaming data segments.

2. The method of Claim 1, wherein the second storage location has a predetermined relation to the first storage location.

1 3. The method of Claim 1, wherein the required data transfer rate is less than a
2 maximum data transfer rate for the disk drive, thereby providing time for transferring
3 the non-time-critical, error-intolerant data segment while maintaining the required data
4 transfer rate for transferring the sequence of time-critical, error-tolerant streaming data
5 segments.

1 4. The method of Claim 1, wherein the time-critical, error-tolerant streaming
2 data segments correspond to audio/visual data.

1 5. The method of Claim 1, wherein the set of data transfer commands requires
2 no disk-drive-resident error recovery in the event of a data transfer error.

1 6. The method of Claim 1, wherein the disk drive is compatible with one or
2 more standards from the group: ATA, SCSI, IEEE 1394.

1 7. A method of storing a non-time-critical, error-intolerant data segment on a
2 disk drive, which is responsive to a set of data transfer commands generated by a host
3 processor and which stores both time-critical, error-tolerant data segments and non-
4 time-critical, error-intolerant data segments, the method comprising:

5 sending a first data transfer command generated by the host processor to
6 the disk drive to write the non-time-critical, error-intolerant data segment on the
7 disk drive;

8 writing the non-time-critical, error-intolerant data segment at a first
9 storage location; and

10 writing the non-time-critical, error-intolerant data segment at a second
11 storage location different from the first storage location.

1 8. The method of Claim 7, wherein the second storage location is at a
2 predetermined position relative to the first storage location.

1 9. The method of Claim 7, wherein the method further comprises:

2 sending a sequence of data transfer commands generated by the host
3 processor to the disk drive to transfer a respective sequence of time-critical,
4 error-tolerant streaming data segments at a required data transfer rate;

5 transmitting a first data transfer error signal generated by the disk drive
6 to the host processor, the data transfer error signal having a state that indicates
7 whether any data transfer errors have occurred with respect to the writing of the
8 non-time-critical, error-intolerant data segment to the first storage location;

9 transmitting a second data transfer error signal generated by the disk
10 drive to the host processor, the data transfer error signal having a state that
11 indicates whether any data transfer errors have occurred with respect to the
12 writing of the non-time-critical, error-intolerant data segment to the second
13 storage location;

14 selectively interposing a second data transfer command into the sequence
15 of data transfer commands to write the non-time-critical, error-intolerant data

16 segment on the disk drive if a data transfer error has occurred with respect to the
17 writing of the non-time-critical, error-intolerant data segment to the first storage
18 location or the second storage location; and
19 writing the non-time-critical, error-intolerant data segment to the disk
20 drive at a third storage location.

1 10. The method of Claim 9, wherein the third storage location is the first storage
2 location if the data transfer error has occurred with respect to the writing to the first
3 storage location, and the third storage location is the second storage location if the data
4 transfer error has occurred with respect to the writing to the second storage location.

1 11. The method of Claim 9, wherein the third storage location is different from
2 both the first storage location and the second storage location.

1 12. A method of transferring a non-time-critical, error-intolerant data segment
2 stored on a disk drive, which is responsive to a set of data transfer commands generated
3 by a host processor and which is operating in a mode optimized for transferring time-
4 critical, error-tolerant streaming data segments stored or to be stored on the disk drive,
5 the method comprising:

6 sending a sequence of data transfer commands generated by the host
7 processor to the disk drive to transfer a respective sequence of time-critical,
8 error-tolerant streaming data segments within a data transfer bandwidth less than
9 a maximum bandwidth for the disk drive;

10 selectively interposing a first data transfer command into the sequence of
11 data transfer commands, the first data transfer command initiating a first transfer
12 of the non-time-critical, error-intolerant data segment from a first storage
13 location, the first transfer of the non-time-critical, error-intolerant data segment
14 occurring within a remaining bandwidth that is a difference between the
15 maximum bandwidth and the data transfer bandwidth;

16 transmitting a data transfer error signal generated by the disk drive to the
17 host processor, the data transfer error signal having a state that indicates whether
18 any data transfer errors have occurred with respect to the first transfer of the
19 non-time-critical, error-intolerant data segment; and

20 selectively interposing a second data transfer command into the sequence
21 of data transfer commands, the second data transfer command initiating a second
22 transfer of the non-time-critical, error-intolerant data segment from a second
23 storage location, thereby utilizing storage redundancy to achieve an accuracy
24 required for the non-time-critical, error-intolerant data segment while
25 maintaining the data transfer bandwidth for the sequence of time-critical, error-
26 tolerant streaming data segments.

1 13. The method of Claim 12, wherein the second storage location has a
2 predetermined relation to the first storage location.

1 14. A video recording system to record and playback non-time-critical, error-
2 intolerant data segments and time-critical, error-tolerant streaming data segments using
3 a disk drive responsive to a set of data transfer commands and optimized for transferring
4 time-critical, error-tolerant streaming data segments at a required data transfer rate, the
5 video recording system comprising:

6 a user interface that receives user input;

7 a video input interface that receives an external video data stream for a
8 selected video program segment and that generates time-critical, error-tolerant
9 streaming data segments;

10 a video output interface that is connectable to a display device; and

11 a data management system that comprises:

12 at least one data buffer that receives, stores, and transmits time-
13 critical, error-tolerant streaming data segments; and

14 a host processor that generates a sequence of data transfer
15 commands sent to the disk drive to transfer a respective sequence of
16 time-critical, error-tolerant streaming data segments at the required data
17 transfer rate; that selectively interposes a first data transfer command into
18 the sequence of data transfer commands, the first data transfer command
19 initiating a first transfer of a non-time-critical, error-intolerant data
20 segment from a first storage location; that receives a data transfer error
21 signal generated by the disk drive, the data transfer error signal having a
22 state that indicates whether any data transfer errors have occurred in the
23 first transfer of the non-time-critical, error-intolerant data segment; and
24 that selectively interposes a second data transfer command into the
25 sequence of data transfer commands, the second data transfer command
26 initiating a second transfer of the non-time-critical, error-intolerant data
27 segment from a second storage location, thereby utilizing storage
28 redundancy to achieve an accuracy required for the non-time-critical,
29 error-intolerant data segment while maintaining the required data transfer

30 rate of the sequence of time-critical, error-tolerant streaming data
31 segments.

1 15. The video recording system of Claim 14, wherein the data management
2 system further comprises at least one data buffer that receives, stores, and transmits non-
3 time-critical, error-intolerant data segments.

1 16. The video recording system of Claim 14, wherein the data management
2 system further comprises a command buffer.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
220

**VIDEO RECORDING SYSTEM UTILIZING STORAGE REDUNDANCY TO
TRANSFER NON-TIME-CRITICAL, ERROR-INTOLERANT DATA
SEGMENTS WHILE TRANSFERRING TIME-CRITICAL, ERROR-
TOLERANT STREAMING DATA SEGMENTS AT A REQUIRED DATA
TRANSFER RATE**

Abstract of the Disclosure

The present invention may be regarded as a video recording system and method of transferring a non-time-critical, error-intolerant data segment stored on a disk drive, which is responsive to a set of data transfer commands generated by a host processor and which is operating in a mode optimized for transferring time-critical, error-tolerant streaming data segments stored or to be stored on the disk drive. The method includes sending a sequence of data transfer commands generated by the host processor to the disk drive to transfer a respective sequence of time-critical, error-tolerant streaming data segments at a required data transfer rate. The method further includes selectively interposing a first data transfer command into the sequence of data transfer commands, the first data transfer command initiating a first transfer of the non-time-critical, error-intolerant data segment from a first storage location. The method further includes transmitting a data transfer error signal generated by the disk drive to the host processor, the data transfer error signal having a state that indicates whether any data transfer errors have occurred with respect to the first transfer of the non-time-critical, error-intolerant data segment. The method further includes selectively interposing a second data transfer command into the sequence of data transfer commands, the second data transfer command initiating a second transfer of the non-time-critical, error-intolerant data segment from a second storage location, thereby utilizing storage redundancy to achieve an accuracy required for the non-time-critical, error-intolerant data segment while maintaining the required data transfer rate of the sequence of time-critical, error-tolerant data segments.

Figure 1:

10 →

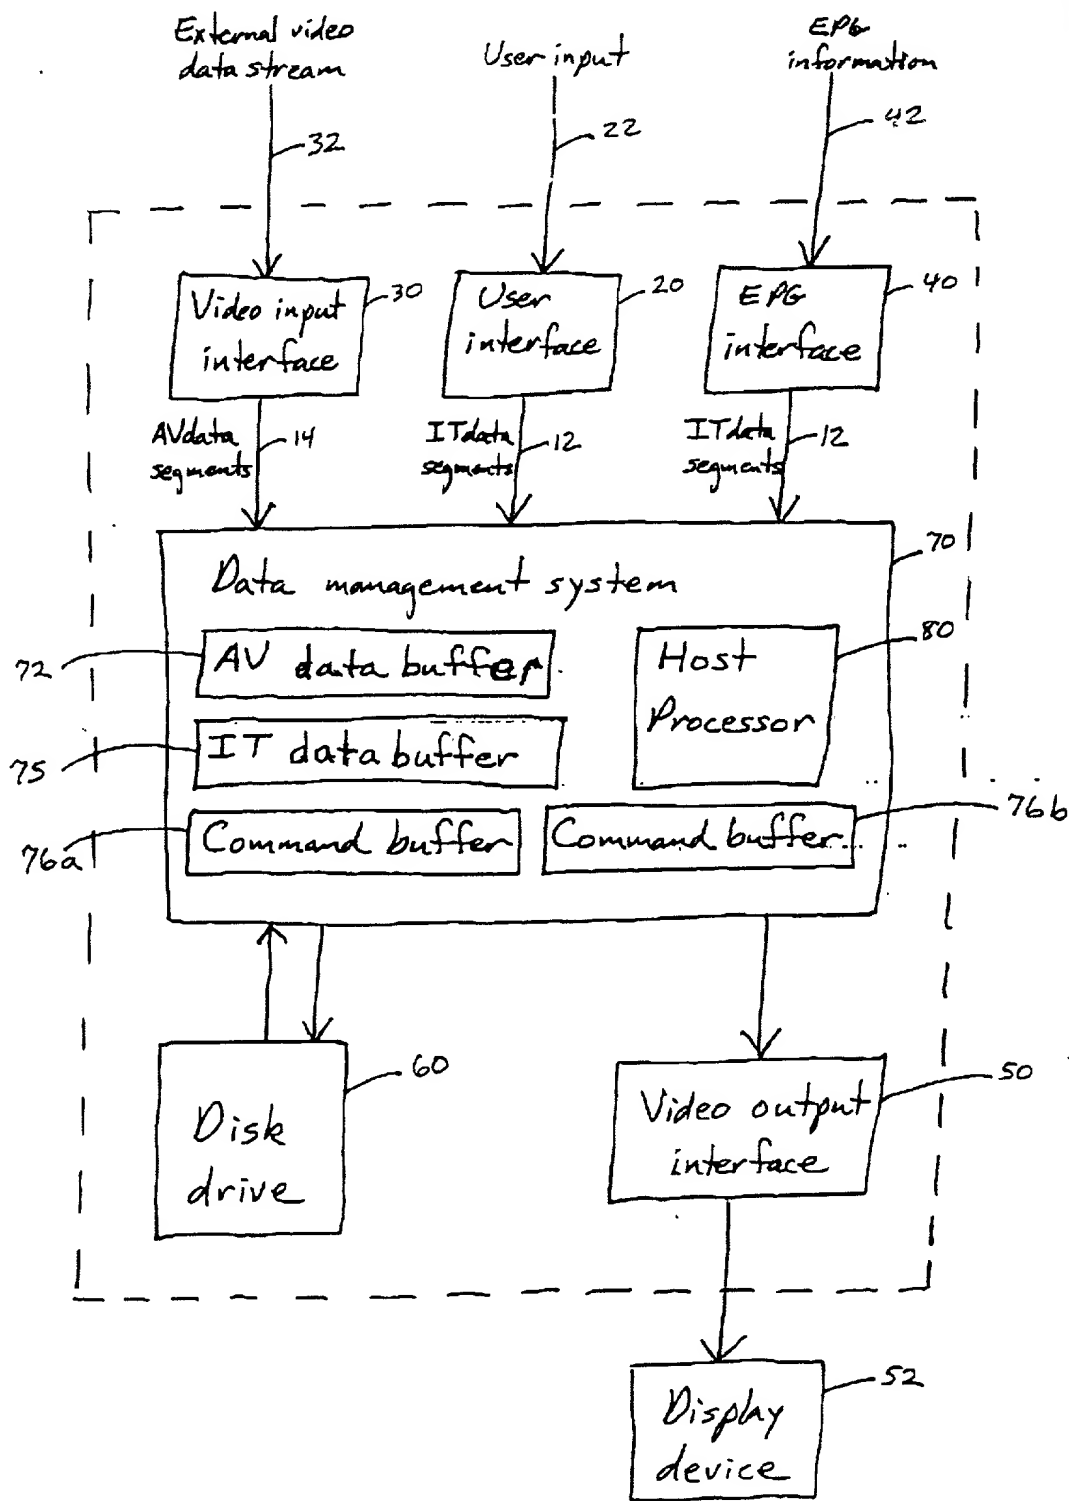


Figure 2a:

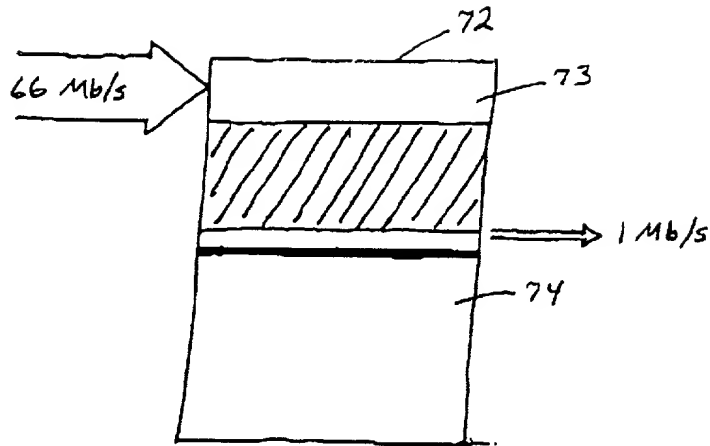


Figure 2b:

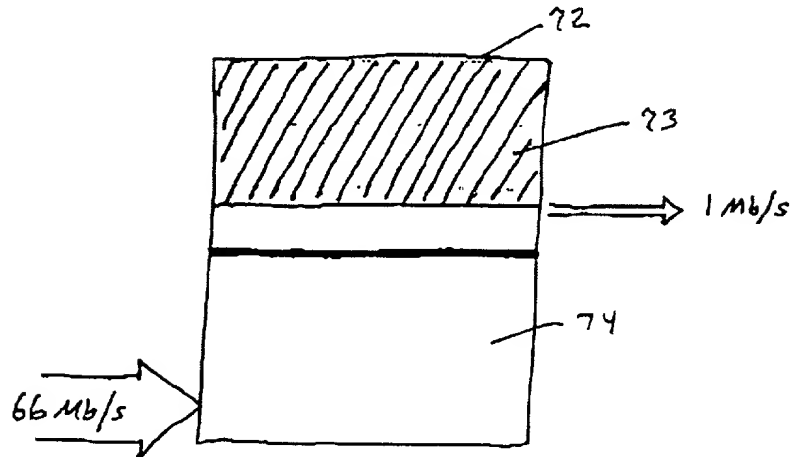


Figure 2c:

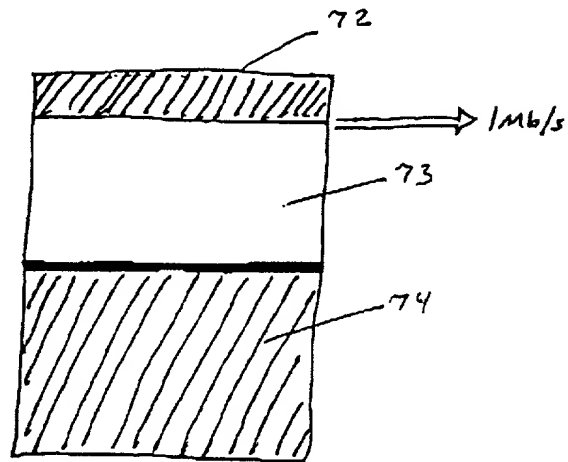


Figure 2d:

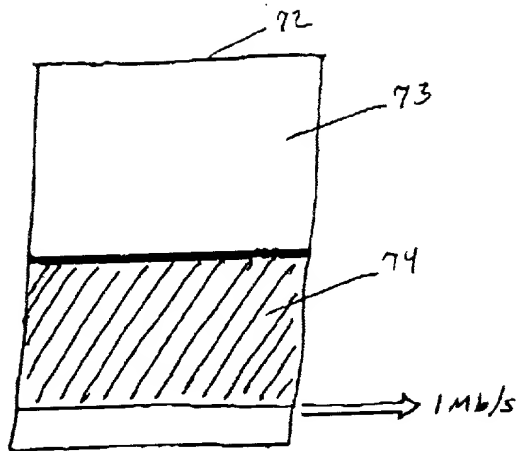


Figure 2e:

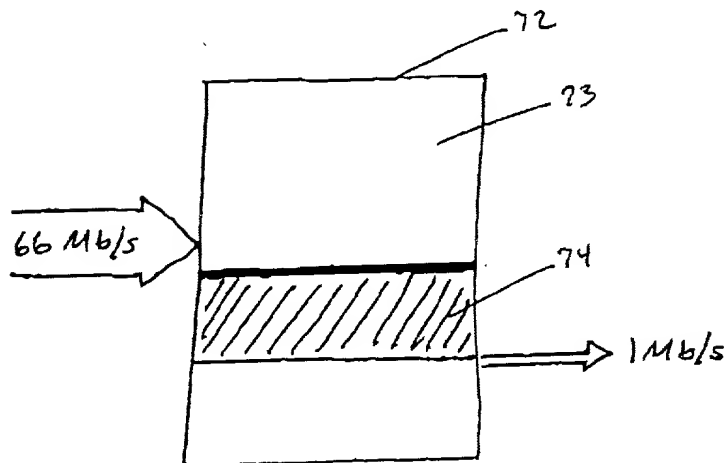


Figure 3a:

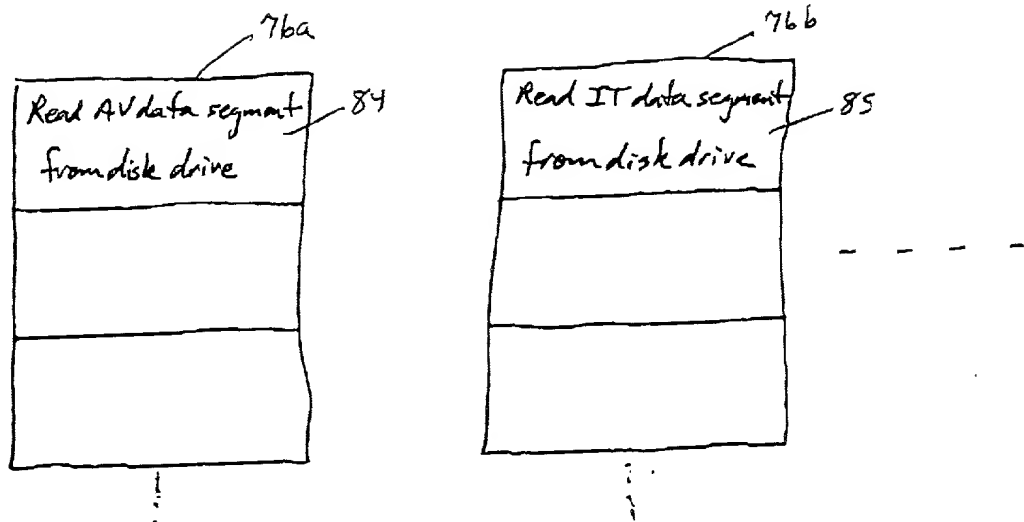


Figure 3b:

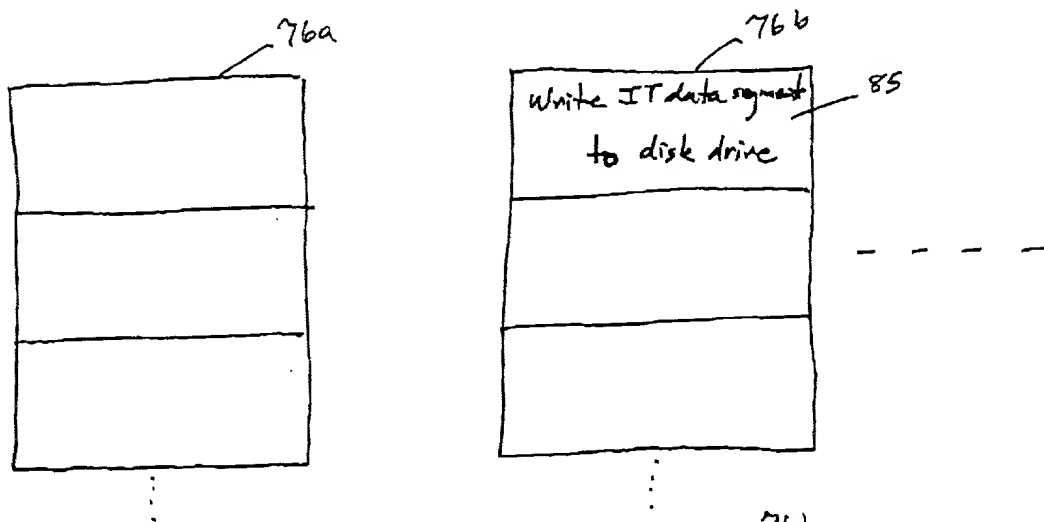


Figure 3c:

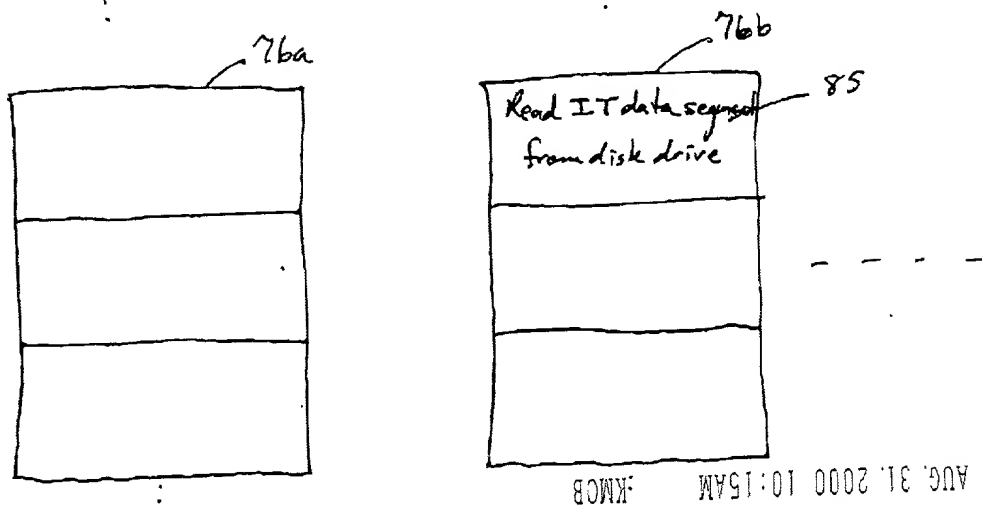


Figure 4:

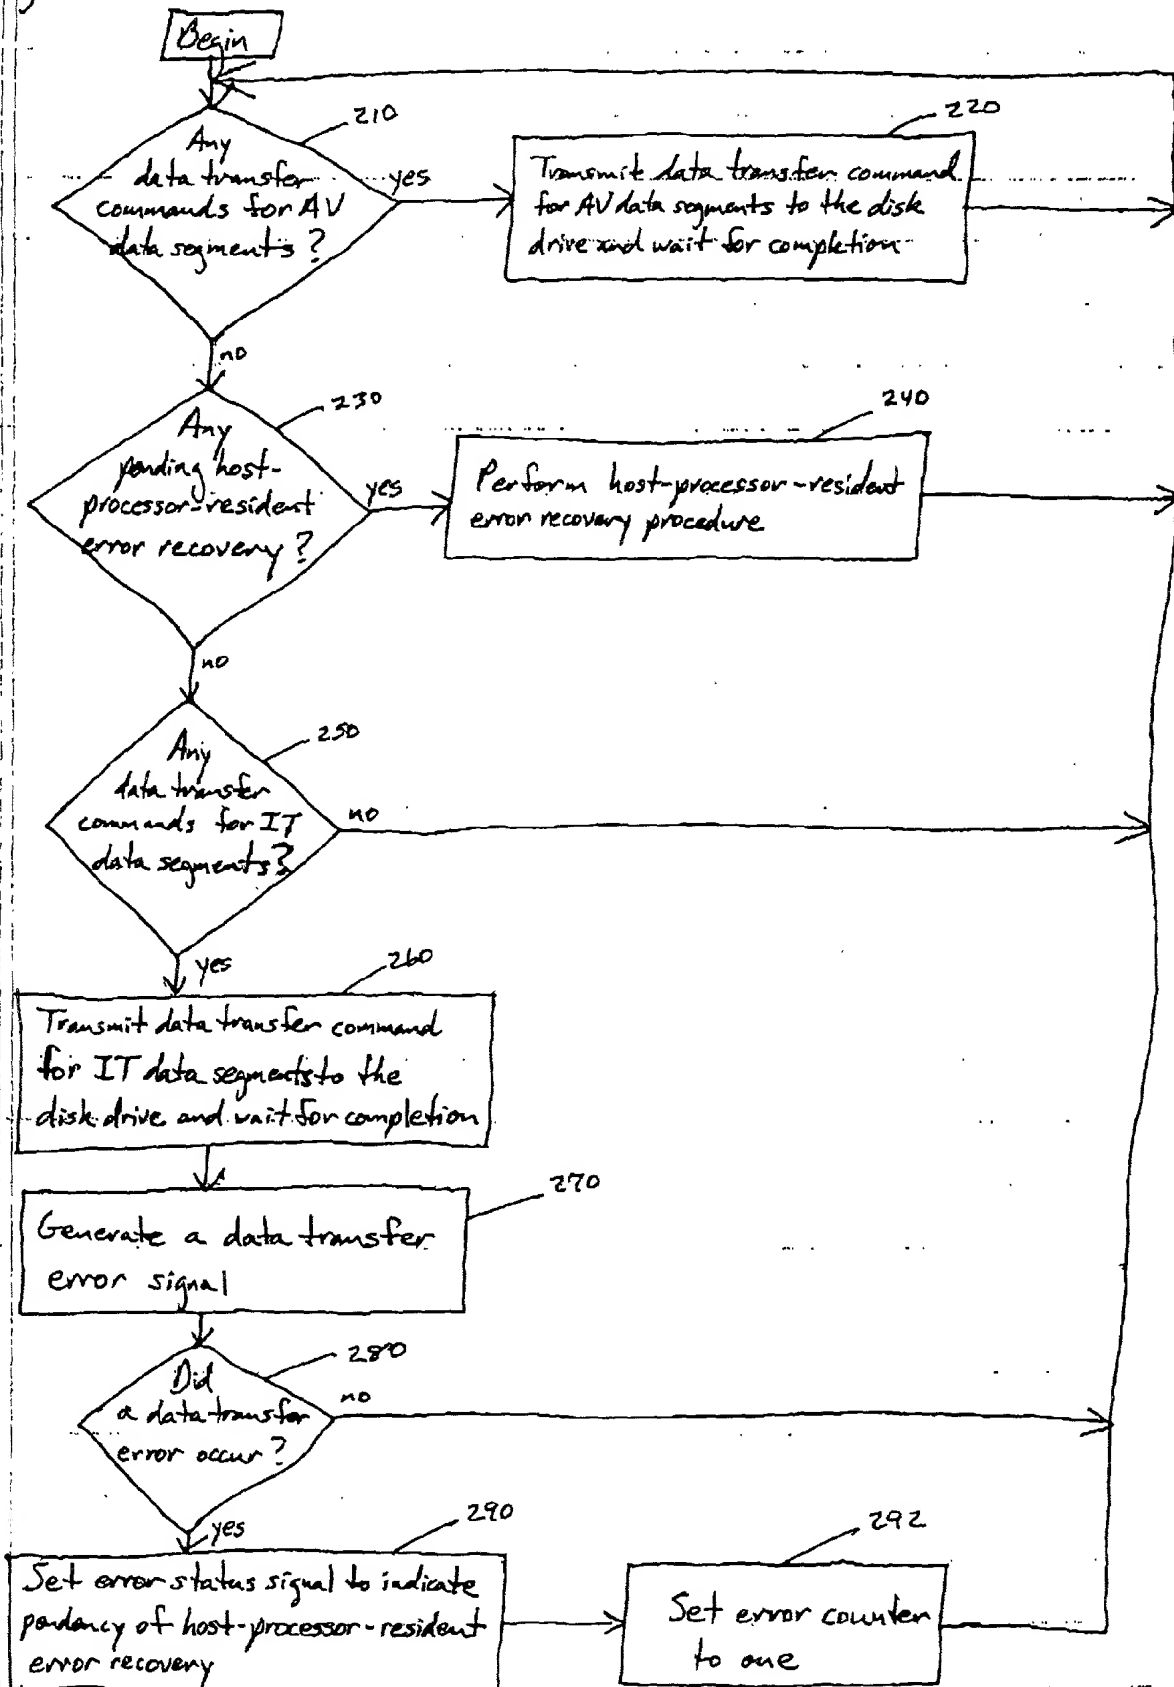


Figure 5:

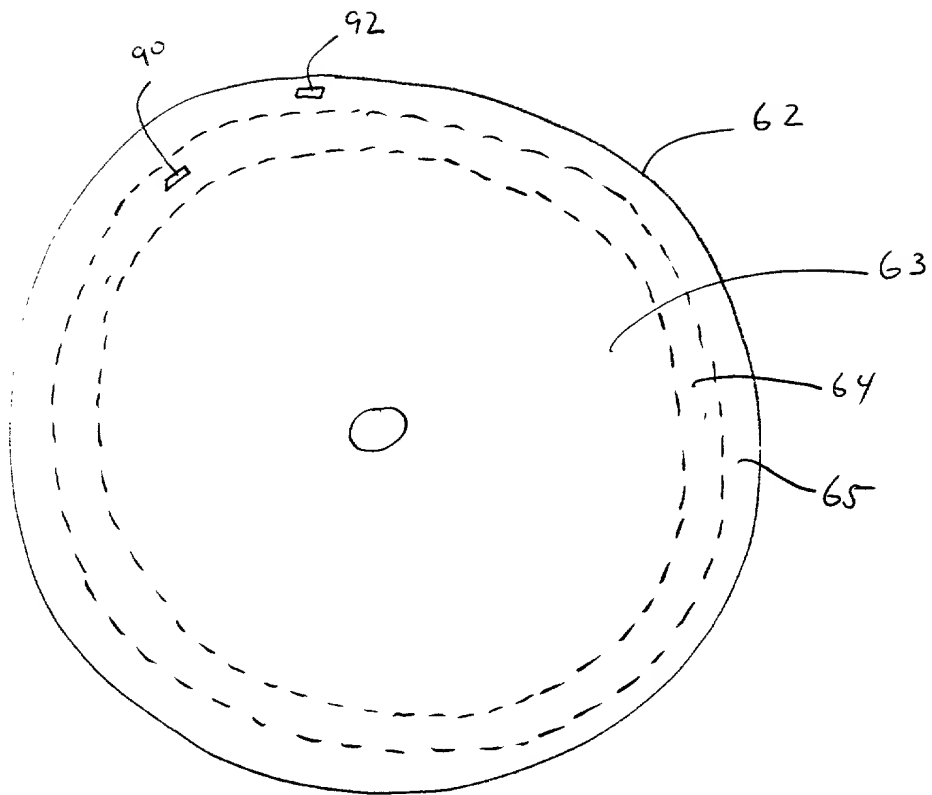


Figure 7a:

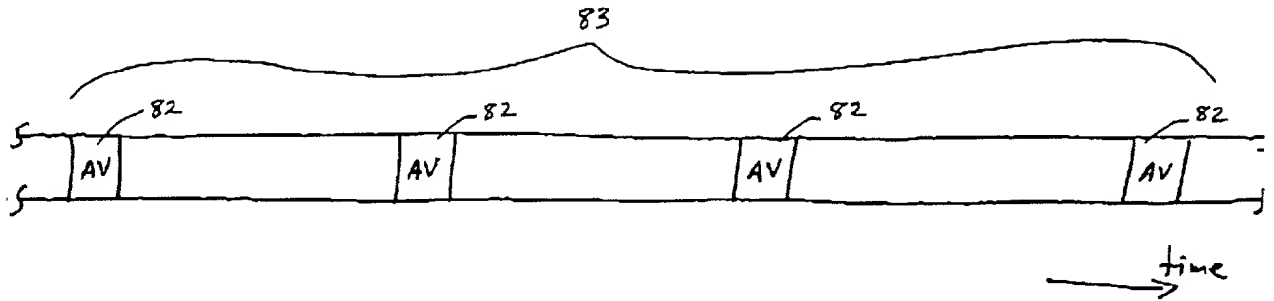


Figure 7b:

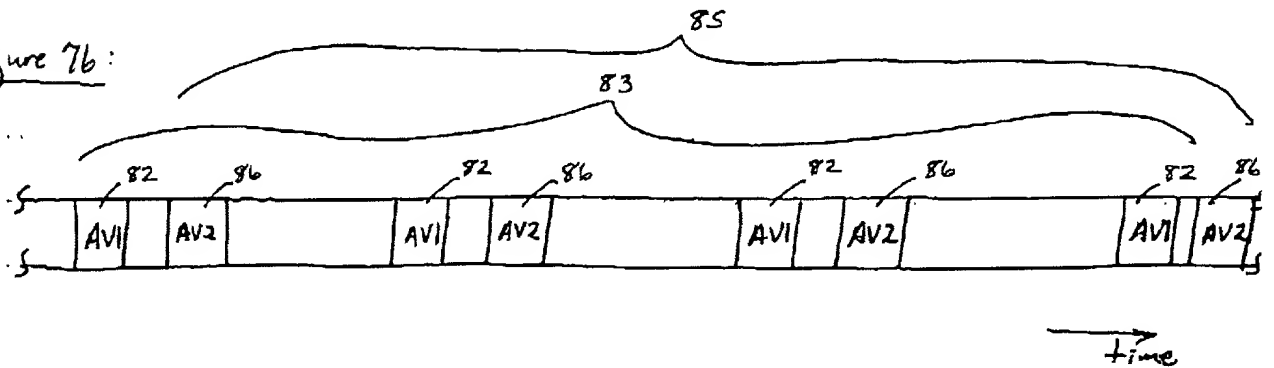


Figure 7c:

